


JA-83M - Wireless magnetic window/door detector



- Designed to detect window or door opening.
- Magnetic sensor is mounted on to plastic or wooden door or window frames.
- Pair to switching receivers to switch appliance, e.g. turn off air conditioning unit or heating to conserve energy.
- Easy pairing to actuators/receivers.
- Can control multiple receivers within range together.

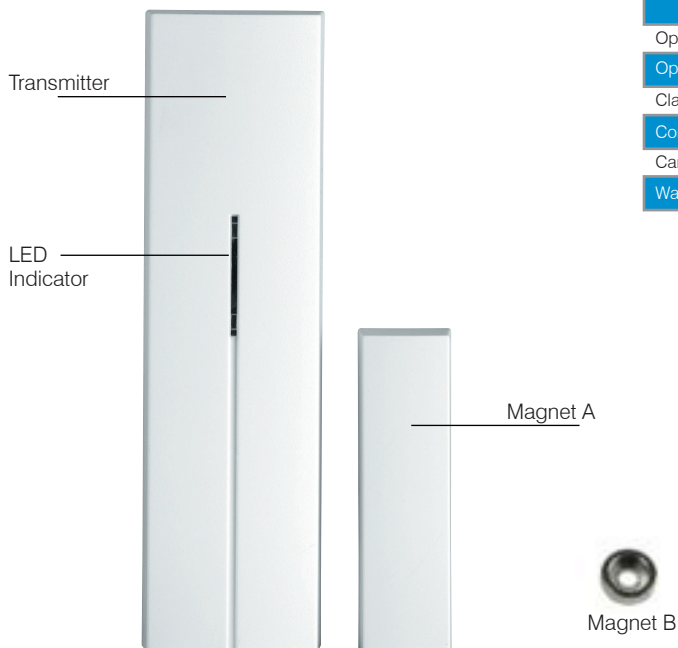

Technical Details

Battery Type:	CR123A Lithium
Voltage:	3.0V DC
Battery Lifetime:	3 Years (approximately)
Communication Band:	868MHz
Communication Range:	300m (open area)
Dimensions:	Transmitter: 75mm x 31mm x 23mm Magnet A: 56mm x 16mm x 15mm Magnet B: 10mm diameter x 4mm
Operational environmental:	Class II. internal
Operational temperature range:	-10 to +40°C
Classification:	Grade 2
Complies with:	ETSI EN 300220, EN50130-4, EN55022, and EN 60950-1
Can be operated according to:	ERC REC 70-03
Warranty:	12 Months